

SPEC

Wireless	Wireless standard	IEEE 802.11b/g/n
	Frequency	2.4GHz ISM band
Video	Type	1/6" color CMOS
	Image resolution	VGA 640X480
	Lens focus	1.5m ~∞
	View angle	17/17/21.5/21.5
	Video compression	MJPEG (Motion JPEG)
	Frame rate	>=15 fps in normal condition
Audio	Audio input	One-way audio with built-in MIC
	Sampling rate	8K, 16 bits
Night vision	Light sensor	Yes
	IR LED	8 pcs, 850 nm wavelength
	Night vision	4 Lux activation
	Night vision range	Clearly see baby face in 1.5m
System	Security	WPA2-PSK (AES, TKIP), WPA-PSK
	Still image capture	Yes
	AP client	Support AP-client
	Power supply	Adapter; 6V, 800 mA
	Dimension (W x H x	85.1 x 106.3 x 85.1 mm
	Operating	0~40 degree C

ONSHINE

昂欣企業有限公司

官網：<http://www.onshine.com.tw>

電話：02-8228-1766

傳真：02-8228-1785



ON SHINE

iRemote

網路監控鐵捲門遙控

輕鬆設定 快速安裝



iRemote

IP CAM 簡易安裝

首先將 IP-CAM VMI110 連接上 WI-FI Router，將 IPCAM 放置於欲監看的環境，並插上電源線，確認紅燈亮起，即完成安裝。

WI-FI&APP 簡易設定




IPCAM & 手機 WI-FI 設定

1. 下載 onshine iRemote 到 IOS&Android 智慧手機並安裝。
2. 手機開啟 WI-FI，搜尋 IP CAM 名稱：Onshine_IPCAM_XXXXX，輸入預設密碼：12345678，確認已連線。



IPCAM 網際網路設定

1. 開啟 APP，即跳出提醒視窗顯示目前為出廠原始設定，若不更改名稱或密碼，按否。
2. 顯示目前尚未連上網際網路，按確定，即進入連線設定。
3. 選擇自家欲使用的 WI-FI Router，並輸入 WI-FI 密碼，即可完成此設定。

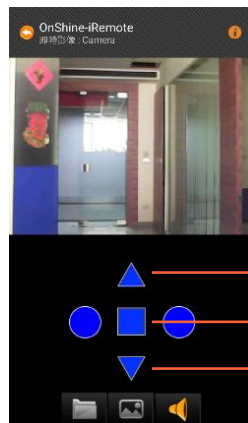

馬上開始使用

開(上)
停止
關(下)

簡單新增用戶

- 後續使用者下載 APP 後，進入右上角選單，點選新增。
- 掃描 IPCAM 底下的 QR CODE，並輸入預設密碼：12345678，確認已連線，即可開始使用



隨裝隨看無限制



不需再設定繁複的網路!!!
簡單連接 WI-FI，即開即看!!!
隨時隨地輕鬆開關門!!!!

店面門口

大樓停車場

房東租屋

